

SAFES

VAULTS AND VAULT DOORS

CATALOGUE 2016



Chubbsafes

Trusted the world over.

MAKE SECURITY A PART OF YOUR EVERYDAY LIFE

Trusted the world over, Chubb safes is the oldest brand for safes, vaults and vault doors in the world. Chubb safes solutions are well known and appreciated for their unique combination of robustness, reliability and modern designs. Having provided high-quality protection solutions for almost two centuries, Chubb safes combines experience with innovation to create trustworthy products for maximum protection against burglary, fire and explosives. The Chubb safes solutions are rigorously tested by international and independent accreditation bodies to guarantee the best protection available.



Chubb safes
Trusted the world over.

CONTENTS

FINDING YOUR SAFE	5
TEST STANDARDS & PRODUCT OVERVIEW	6
LOCKING OPTIONS	8
PRODUCTS	
OPTIONAL FITTINGS	34

Air	9
Air Hotel	10
Viper	11
Alpha Plus	12
Omega Deposit	13
Cube Safe	14
E-slot Safe	15
Omni	16
Omni Drawer Trap	17
DuoGuard	18
Oxley MK III	19
Eurpoa GIII	20
Europa GV	21
Archive Cabinet	22
DPC	23
Fire File 25"	24
Fire File 31"	25
DataGuard NT	26
DataPlus+	27
Counter Unit	28
Pistol Safe	29
Deposit Container	30
Drug Safe	31
InstaVault	32
Vault Doors	33

ICONS EXPLAINED



Burglary



Fire
paper doc.



Fire
data media



SIMPLY FIND YOUR PRODUCT

The Chubb Safes Product Selector is designed to assist you in finding the right product. It is easy to navigate and helps you determine what you are looking for by product feature, valuable to protect, locking solution or protection needed. Not sure which safe to choose to protect your documents, your electronics or jewellery? The Chubb Safes Product Selector helps you compare products in order to make the right purchasing decision.

CHECK IT OUT AND FIND YOUR NEAREST LOCAL
CHUBBSAFES CONTACT ON WWW.CHUBBSAFES.COM

WHICH SAFE IS RIGHT FOR YOU?

The most important initial question is what you want to protect – cash and valuables, documents or data media?

CASH AND VALUABLES

Choose from the burglary protection range. This includes safes, cabinets, vaults & vault doors, designed to withstand physical attacks in different strengths or Grades. Each Grade represents a particular “cash rating” which is the amount an insurer will cover*.

* The actual amount of cover can vary between insurance companies and country, and may be different to the manufacturer's recommended rating. You should always check what cover your insurance company is prepared to offer.

DOCUMENTS AND DATA MEDIA

Choose from the fire protection range which includes safes and filing cabinets designed to keep documents or data media safe from the effects of a fire.

DOCUMENTS

To survive a fire, documents require protection from temperatures higher than 177°C. Therefore cabinets have to be specifically designed, tested and then certified for this task. Without a credible certification, you cannot be sure that your documents are safe.

DATA MEDIA

The same is valid for data media, except here the cabinet must offer much greater protection due to the sensitivity of the material. If the inside of the cabinet exceeds a mere 55°C, then the information on a CD, DVD or tape will be destroyed.



CERTIFIED STRENGTH

To provide the appropriate level of protection, the products are tested to comply with the latest industry standards. The various certification tests carried out in independent laboratories for burglary or fire protection are conducted by experienced operators armed with plans of the product and a whole range of tools.

FOR BURGLARY PROTECTION, safes and vaults are awarded grades:

- For security cabinets, there are Grades S1 and S2 (EN 11450).
- For safes, vaults and vault doors, they are rated from Grade 0 to Grade XIII (EN 1143-1) and from class TL-15 to class 3 (UL 687 and UL 608).
- High security locks are graded according to EN 1300 or UL 1034 and security doors sets, windows and partitions are ranked from RC1 to RC6 (EN 1127).

During the certification process, door panels of the products, bolt works, locks and handles are tested. The certification tests include an attack program that is devised so that various break-in attempts can be made using a selection of tools. A correlation between tool type and the time for which each one is used can be used to obtain a resistance score (resistance unit). The higher the score, the higher the level of resistance. Based on the results obtained, the safe is given a classification and then listed in a resistance grade.

FOR FIRE PROTECTION, these standards vary according to whether you want to protect paper documents, digital media or other highly sensitive objects. This is because the temperature at which data media (e.g. 52°C) and documents (e.g. 177°C) deteriorate differs according to the item protected:

- In order to fully protect data media, industry standards indicate that products should carry ECB•S EN 1047-1, UL 72 Class 125 or NT Fire 017 60/120 DIS.


The ECB•S and UL tests monitor the internal temperature of the data cabinet until it has completely cooled down during the “soakout” period. Assessing products during this period is essential, since internal temperatures can peak up to six to eight hours after a fire has been extinguished. Such tests ensure that all products are comprehensively tested and, upon passing, will fully protect your data media for the specific time period stated.

- For document protection, all products must have an appropriate industry standard 30- or 60-minute paper certificate.

UL72-Class 350, ECB•S EN 1047-1, EN 15659 or NT Fire 017 are acceptable standards for paper document protection.


LEVELS OF RESISTANCE

Alongside extremely strict standards, you will also find a number of others that are less stringent in terms of resistance.

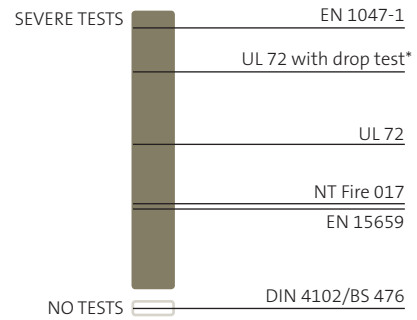

* Test UL 72 does not necessarily involve conducting a drop test.

HIGHEST ALLOWED INSIDE TEMPERATURE

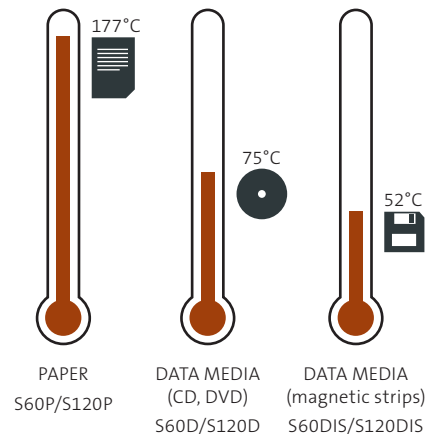

STANDARDS IN BRIEF

STANDARDS	TEMPERATURE TEST	DROP TEST	PAPER	DATA MEDIA	COOLING
EN 1047-1	1090°C	9.15 metres	S 60P (60 min.) / S 120P (120 min.)	S 60DIS (60 min.) / S 120DIS (120 min.)	incl. the cooling period
UL 72	1000°C	9.15 metres*	Class 350 (1/2, 1, 2 hours)	Class 125 (1/2, 1, 2 hours)	incl. the cooling period
EN 15659	850°C	no	LFS 30P (30 min.) / LFS 60P (60 min.)	no application	not tested
NT Fire 017	927°C	no	60 paper (60 min.) / 120 paper (120 min.)	60 diskettes (60 min.) / 120 diskette (120 min.)	not tested
DIN 4102/BS 476	not tested	not tested	not tested	not tested	not tested

* Test UL 72 does not necessarily involve conducting a drop test.

EUROPEAN CERTIFICATION FOR SAFES, VAULTS AND VAULT DOORS EXPLAINED

In order to attest to the quality of a certified product, an information plate is adhered to the inside of the product. This provides you with guarantees that the product has been tested and manufactured in an environment that has been checked by the certifying body.

Below is shown the ECB-S label and the details listed on the information plate.

BURGLARY PROTECTION CERTIFICATION

SERIAL NO.
Each product can be identified by a unique serial number. This number is given by the certifying body

EN 1143-1/EN 14450
The European standard that the product meets

CERT. MARK. NO.
Certificate number issued by the certifying body

RESISTANCE GRADE
Resistance classes

WEIGHT
The safe's net weight. A 15% tolerance in the net weight indicated is accepted

YEAR OF MANUFACTURE
The year that the product was manufactured

The diagram shows a blue label for a 'SAFE' with the following fields: 'Cert. mark No.', 'Resistance grade' (indicated by three vertical bars), 'Serial No.', 'Weight', and 'Year of manufacture'. The label also includes the text 'Certified according to EN 1143-1 European Certification Body GmbH, Frankfurt, Main accredited according to ISO/IEC 17065' and the ECB-S logo with the website 'www.ecb-s.com'.

Through partnerships entered into with the ECB-S, the bodies listed here issue identical certificates: VdS (Germany), ICIM (Italy), a2p (France), SBSC (Sweden).

FIRE PROTECTION CERTIFICATION

SERIAL NO.
Each product can be identified by a unique serial number. This number is given by the certifying body

EN 1047-1/EN 15659
The European standard that the product meets

CERT. MARK. NO.
Certificate number issued by the certifying body

PROTECTION CLASS
Resistance classes

WEIGHT
The safe's net weight. A 15% tolerance in the net weight indicated is accepted

YEAR OF MANUFACTURE
The year that the product was manufactured

The diagram shows a blue label for a 'DATA CABINET' with the following fields: 'Cert. mark No.', 'Protection class' (indicated by 'S 120 DIS'), 'Serial No.', 'Weight', and 'Year of manufacture'. The label also includes the text 'Certified according to EN 1047-1 European Certification Body GmbH, Frankfurt, Main accredited according to ISO/IEC 17065' and the ECB-S logo with the website 'www.ecb-s.com'.

Fire certification is issued by independent approved laboratories. Here are some examples of test institutes and certificates that you may encounter: ECB-S, UL, iBMB, MPA Dresden, Applus RTD, SP, VdS.

FOR MORE DETAILED INFORMATION, contact your insurance company or visit the chubb safes.com website.

LOCKING OPTIONS

Depending on the range, you can customise your product with a different lock. Thus you can benefit from a comprehensive lock offering that includes the latest industry solutions, which offer a wide range of features. So whether it be the “mechanical combination” lock or an electronic solution, you can be sure to have a lock that will meet your security needs. Below the key terms associated with the range of locks.

Definitions:

KEY LOCK: A manual key-operated lock.

MECHANICAL COMBINATION: A mechanical keyless dial lock with a changeable combination.

ELECTRONIC LOCK: An electronically-operated keypad lock with a changeable combination.

MANAGER MODE: Allows one user to control the functions of other combination holders.

NUMBER OF USERS: The number of users able to program in their own access code.

DURESS FEATURE: An alarm engineer can link the lock into a monitored alarm system. Then, using a given procedure, the lock can be operated, the safe opened and a silent signal given to the monitoring station that this is being done under duress.

TIME DELAY: This feature allows for a pre-set delay between operating the lock and being able to open the safe. The operation may vary between lock types.

TIME LOCK: Time lock allows the user to set periods during which the lock may be operated, e.g. during business hours only. The options available will vary between locks.

AUDIT TRAIL: The lock is able to give a report (it will vary in detail from model to model) of usage and may show times of operation, codes used and operations performed.

DUAL CONTROL: Allows two users to enter their details before any operation can be performed.

SAFES, VAULTS AND VAULT DOORS BY CERTIFICATION

PRODUCT	CERTIFICATION STANDARD	PROTECTION OR RESISTANCE LEVEL	CERTIFICATION BODY
BURGLARY PROTECTION			
Air	n/a	n/a	n/a
Alpha Plus	n/a	n/a	n/a
Omega Deposit	n/a	n/a	n/a
Cube Safe	n/a	n/a	n/a
E-slot Safe	n/a	n/a	n/a
Counter Unit	n/a	n/a	n/a
Drug Safe	n/a	n/a	n/a
Omni Drawer Trap	n/a	n/a	n/a
Europa GIII	EN 1143-1 & AS/NZS 3809	Grade III & Level 3	ECB•S & AS/NZS
Europa GV	EN 1143-1 & AS/NZS 3809	Grade V & Level 5	ECB•S & AS/NZS
Pistol Safe	n/a	n/a	n/a
Deposit Container	n/a	n/a	n/a
InstaVault	n/a	n/a	n/a
Vault Doors	n/a	n/a	n/a
FIRE PROTECTION			
Archive Cabinet	n/a	n/a	n/a
Fire File 25"	UL 72 Class 350	1h Fire	UL
Fire File 31"	UL 72 Class 350	1h to 2h Fire	UL
DataGuard NT	NT Fire 017	120 min Diskette	SP
COMBINED BURGLARY AND FIRE PROTECTION			
Viper	EN 14450 & EN 15659	Level S2 & 30 min Paper	ECB•S
DPC	UL 72 Class 350	2h	UL
Omni	JIS S 1037:1989	45min	JIS
DuoGuard	EN 1143-1 & EN 1147-1	Grade 0 to I & S 60 P	ECB•S
Oxley MK III	EN 1047-1	S 60 P	ECB•S
DataPlus+	EN 14450 & EN 1047-1 & UL 72 Class 125	Level S2 & 120 min Diskette	ECB•S & UL



MODEL SHOWN: AIR 10 EL



AIR

BURGLARY-RESISTANT SAFE

KEY FEATURES

- Compact safe, ideal for home or office
- 4mm-thick steel door, 2mm-thick steel body frame
- Choice of key lock or electronic lock
- Three sizes available: 9-, 16- and 24-litres capacities. The largest is designed to accommodate most laptop computers

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)	Standard internal fittings
	Height	Width	Depth*	Height	Width	Depth			
Air 10	200	310	200	190	300	150	9	7	–
Air 15	250	350	250	240	340	200	16	10	1 shelf
Air 25 Laptop	200	430	350	190	420	300	24	12	–

Dimensions exclude handle and hinge projections. * In electronic models, add 20mm to allow for keypad projection.



MODEL SHOWN: AIR HOTEL



AIR HOTEL

BURGLARY-RESISTANT SAFE

KEY FEATURES

- Compact safe for burglary protection in hotel rooms, student residences or other high-turnover accommodations
- 4mm-thick steel door, 2mm-thick steel body frame
- Anchoring kit included to prevent from unauthorised removal
- Lock alternatives: Electronic lock with audit trail

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)
	Height	Width	Depth	Height	Width	Depth		
AIR Hotel EL	200	430	350	190	420	300	24	12

Dimensions exclude handle and hinge projections.



MODEL SHOWN: VIPER 50 EL

VIPER

BURGLARY- & FIRE-RESISTANT SAFE



KEY FEATURES

- Combined fire and burglary protection in one safe
- EN 14450 certified by ECB+S to level S2 burglary protection
- EN 15659 certified by ECB+S for 30-minute fire protection for documents
- Choice of 6 sizes: from 11- to 91-litre capacity
- Choice of locking options in all sizes: EN 1300 certified double-bitted key lock or EN 1300 certified electronic lock
- Dual base fixing holes, supplied with two concrete anchor bolts
- Ideal safe for protecting cash and valuable items, as well as passports, title deeds and other important documents in the home and office
- The safe door is secured using the new revolutionary “V” bolt system. The design of the locking bolts helps maintain door integrity both when under physical attack and during a fire

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)	Standard internal fittings
	Height	Width	Depth*	Height	Width	Depth			
10	300	360	300	210	270	191	19	11	–
20	300	445	390	210	355	281	21	25	1 shelf
35	450	445	390	360	355	281	36	34	1 shelf
50	600	445	390	510	355	281	51	42	1 shelf
70	800	445	390	710	355	281	71	53	1 shelf
90	1000	445	390	910	355	281	91	64	2 shelves

* Hinges project 20mm beyond the depth given above. In standard electronic models, the overall projection increases to 30mm.



MODEL SHOWN: ALPHA PLUS 6 EL



ALPHA PLUS

BURGLARY-RESISTANT SAFE

KEY FEATURES

- Cost-efficient storage solution for home and small office
- 6mm-thick steel door, 3mm-thick steel outer body frame, 2mm-thick steel inner body frame, mineral wool filling, 25mm diameter steel locking bolts
- Anchoring kit included to prevent unauthorised removal
- Lock alternatives:
 - Double bitted key lock
 - Programmable electronic lock
- Choice of 6 sizes from 3 to 60 litres

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)	Standard internal fittings
	Height	Width	Depth	Height	Width	Depth			
Sz 1	180	310	205	100	230	112	3	14	1 shelf
Sz 2	270	350	345	190	270	252	13	26	1 shelf
Sz 3	320	440	395	240	360	302	26	40	1 shelf
Sz 4	410	460	395	330	380	302	38	40	1 shelf
Sz 5	440	320	395	360	240	302	26	52	1 shelf
Sz 6	610	460	395	530	380	302	60	65	1 shelf

Dimensions exclude handle and hinge projections.



MODEL SHOWN: OMEGA DEPOSIT 2 KL

OMEGA DEPOSIT

BURGLARY-RESISTANT SAFE



KEY FEATURES

- Burglary protection for your cash deposits, ideal for retailers
- 10mm steel door, 6mm steel frame, 20mm diameter steel locking bolts
- Anti-fishing device included to prevent removal of deposits once deposited into chute
- Anchoring kit included to prevent unauthorised removal
- Lock alternatives:
 - Double bitted 8-lever key lock
 - Programmable electronic lock
 - Dual control key and electronic lock
- Choice of 2 sizes, 24 and 48 litres

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)	Standard internal fittings
	Height	Width	Depth	Height	Width	Depth			
Sz 1	455	340	380	212	328	308	24	54	–
Sz 2	698	340	380	455	328	308	48	75	1 shelf

Dimensions exclude handle and hinge projections. Deposit opening measures 80mm high x 265mm wide x 220mm deep.



CUBE SAFE

BURGLARY-RESISTANT SAFE



KEY FEATURES

- Burglary protection for around your home or office
- \$5,000 cash rating
- Low weight barrier material that optimise cost, transport and installation
- Body and door are made from 12mm solid steel
- Digital electronic lock
- Backup battery pack provided and over-ride key
- Fixed shelf included providing organised storage

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)	Standard internal fittings
	Height	Width	Depth	Height	Width	Depth			
SC 1	355	355	355	330	330	290	32	75	1 shelf

Dimensions exclude handle and hinge projections.



E-SLOT SAFE



BURGLARY-RESISTANT SAFE

KEY FEATURES

- Burglary resistant protection small deposit safe designed to provide safe secure storage for cash
- Up to \$5000 cash rating
- Body and door are made from 12mm solid steel
- Allows anyone to drop items into the slot
- Access only by digital electronic lock
- Backup battery pack provided
- Fixed shelf included

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)	Standard internal fittings
	Height	Width	Depth	Height	Width	Depth			
SES	355	355	355	330	330	290	32	75	-


Dimensions exclude handle and hinge projections.



PRODUCT SHOWN: OMNI SIZE 4

OMNI

BURGLARY- & FIRE-RESISTANT SAFE



KEY FEATURES

- Combined fire and burglary protection in office environments
- \$25,000 cash rating
- Certified to JIS S 1037:1989 offers up to 45 minutes paper fire protection
- Tested to the highest quality in its class against attack. Approved by Sold Secure to Gold Standard for burglary protection. Sold Secure is an independent testing authority approved by the British Home Office
- Secured by an electronic lock as standard
- 10mm solid steel door
- Supplied with glass relocker
- Available in seven sizes
- Complete with a standard internal steel shelf adjustable in intervals
- Solid bolt on hinged side of the door

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)	Standard internal fittings
	Height	Width	Depth*	Height	Width	Depth			
Sz 1	410	360	360	278	230	230	15	120	–
Sz 2	488	435	435	356	305	305	33	180	–
Sz 3	590	435	445	458	305	305	43	210	–
Sz 4	590	550	550	458	420	420	81	300	–
Sz 5	717	550	550	585	420	420	103	340	–
Sz 6	894	550	550	762	420	420	134	400	–
Sz 7	1047	640	640	915	510	510	236	540	–

* Handle projection is 56mm.



MODEL SHOWN: OMNI DRAWER TRAP SIZE 2

OMNI DRAWER TRAP



BURGLARY-RESISTANT SAFE

KEY FEATURES

- Combined fire and burglary protection for home, office and retail environments where access to the safe is required for deposit without the need to open the safe
- \$25,000 Cash Rating
- Tested to the highest quality in its class against attack. Approved by Sold Secure to Gold Standard for burglary protection. Sold Secure is an independent testing authority approved by the British Home Office
- Providing a Drawer Trap adds an additional layer of security as only one person is required to have full access to the safe
- Secured with key lock as standard
- 10mm solid steel door
- Safe is fitted with a drawer trap deposit
- Supplied with glass relocker
- A second lock can be fitted (sizes 5 and 7)
- Available in 3 sizes
- Deposit draw fitted with Mauer key lock

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)	Standard internal fittings
	Height	Width	Depth*	Height	Width	Depth			
Sz 2	742	435	435	356	305	305	33	270	1 anti-spill plate
Sz 5	895	550	550	585	420	420	103	515	1 anti-spill plate
Sz 7	1301	640	640	915	510	510	236	866	1 anti-spill plate


* Handle projection is 56mm.



MODEL SHOWN: DUOGUARD 450

DUOGUARD

BURGLARY- & FIRE-RESISTANT SAFE



KEY FEATURES

- Combined resistance against burglary and fire, ideal for office and retail environments
- Certified by ECB•S according to EN 1143-1, Grade I for burglary protection
- Certified by ECB•S according to EN 1147-1 for fire protection of paper documents for up to 60 minutes
- Dualite new composite barrier-material to ensure dual protection while reducing total weight to minimise transport and installation cost
- Three-way solid steel boltwork, active relocker and anti-drilling plates for enhanced security
- Ergonomic soft-touch handle for comfort in use
- Maximised storage capacity with customisable capabilities
- Lock alternatives: EN 1300-certified Class A key lock and/or EN 1300-certified Class B electronic lock
- Choice of 5 sizes ranging from 62 to 443 litres
- Optional internal fittings: removable shelf, extendable shelf, lockable drawer, lockable compartment, extensible tray, file frame. Data media insert certified 60 Diskette by NT Fire 017 for up to 60 minutes fire protection. Read more on page 34

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)	Standard internal fittings
	Height	Width	Depth	Height	Width	Depth			
60	530	500	521	430	400	360	62	115	1 shelf
110	690	600	561	590	500	386	114	161	2 shelves
150	875	600	561	775	500	386	150	196	2 shelves
350	1600	675	585	1500	575	410	354	352	3 shelves
450	1850	675	615	1750	575	440	443	415	4 shelves

SPECIFICATIONS FOR **OPTIONAL FITTINGS** ARE AVAILABLE ON PAGE 34

Dimensions exclude handle and hinge projections.



OXLEY MK III

BURGLARY- & FIRE-RESISTANT SAFE



KEY FEATURES

- Combined fire and burglary protection for business and retailers
- \$60,000 Cash Rating
- Certified by ECB•S according to EN 1047-1 for up to 60 minutes data media fire protection
- Tested to the highest quality in its class against attack. Approved by Sold Secure to Gold Standard for burglary protection. Sold Secure is an independent testing authority approved by the British Home Office
- All Chubbsafes' locks are tested to conform with the requirements of EN 1143-1
- 6 Sided Tool and Torch Resistant Barrier (TDR)
- Base fixing is standard on all models
- Lock alternatives:
 - Combination lock and key lock or
 - Electronic lock and key lock
- Stocked in 3 sizes. Additional sizes available on special request
- The Oxley Mark III can be customised with a choice of locking options, deposits, shelves and lockable drawer deposits in order to meet customer requirements. Read more on page 34

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)	Standard internal fittings
	Height	Width	Depth	Height	Width	Depth			
Sz 0	568	508	450	400	340	209	28	274	1 shelf
Sz 1	628	528	603	460	360	360	60	330	1 shelf, 2 drawers
Sz 3	1018	668	663	850	500	420	179	663	2 shelves, 2 drawers
Sz 5	1468	668	773	1300	500	530	345	1054	2 shelves, 2 drawers

SPECIFICATIONS FOR **OPTIONAL FITTINGS** ARE AVAILABLE ON PAGE 34

Dimensions exclude handle and hinge projections.



MODEL SHOWN: EUROPA SIZE 5

EUROPA G III

BURGLARY-RESISTANT SAFE



KEY FEATURES

- Burglary protection for high level business and financial institutions
- \$100,000 Cash Rating
- Certified by ECB•S according to EN 1143-1
- Certified to Level 3 according to AS/NZS 3809 (Safes and Strongrooms)
- Chubbsafes special barrier material is applied in the construction of the safe to protect against varying kinds of burglary attack
- Active and passive relocking system
- Torch and Drill Resistant (TDR)
- Lock alternatives:
 - Combination lock and key lock or
 - Electronic lock and key lock
 - Optional time delay locks available
- Choice of 4 sizes ranging from 179 to 503 litres
- Optional internal fittings: deposits, shelves and lockable drawer deposits in order to meet customer requirements. Read more on page 34

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)	Standard internal fittings
	Height	Width	Depth	Height	Width	Depth			
Sz 3	1018	668	663	850	500	420	179	747	2 shelves, 2 drawers
Sz 4	1208	668	773	1040	500	530	276	920	2 shelves, 2 drawers
Sz 5	1468	668	773	1300	500	530	345	1084	2 shelves, 2 drawers
Sz 6	1796	903	663	1628	735	420	503	1400	2 shelves, 2 drawers

SPECIFICATIONS FOR **OPTIONAL FITTINGS** ARE AVAILABLE ON PAGE 34

Dimensions exclude handle and hinge projections.



MODEL SHOWN: EUROPA SIZE 6

EUROPA GV

BURGLARY-RESISTANT SAFE



KEY FEATURES

- Burglary protection for high level business and financial institutions
- \$300,000 Cash Rating
- Certified by ECB•S according to EN 1143-1
- Certified to Level 5 according to AS/NZS 3809 (Safes and Strongrooms)
- Chubb safes special barrier material is applied in the construction of the safe to protect against varying kinds of burglary attack
- Active and passive relocking system
- Torch and Drill Resistant (TDR)
- Lock alternatives:
 - Combination lock and key lock or
 - Electronic lock and key lock
 - Optional time delay locks available
- Choice of 2 sizes ranging from 400 to 503 litres
- Optional internal fittings: deposits, shelves and lockable drawer deposits in order to meet customer requirements. Read more on page 34

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)	Standard internal fittings
	Height	Width	Depth	Height	Width	Depth			
Sz 5*	1480	680	773	1338	538	554	400	1197	2 shelves, 2 drawers
Sz 6	1808	915	663	1666	773	444	572	1560	2 shelves, 2 drawers

SPECIFICATIONS FOR **OPTIONAL FITTINGS** ARE AVAILABLE ON PAGE 34

Dimensions exclude handle and hinge projections. *Denotes that items not stocked – order as required.



MODEL SHOWN: ARCHIVE CABINET 450 KL



ARCHIVE CABINET

FIRE-RESISTANT DOCUMENT CABINET

KEY FEATURES

- Storage cabinets with fire protection in your office
- Double-wall construction with special fire-resistant barrier material
- Three-way solid steel boltwork for enhanced security
- Anchor points in base to fix the cabinet to the floor
- Wide fitting capabilities to suit a variety of storage requirements
- Supplied with an EN 1300-certified Class A key lock
- Choice of 4 sizes ranging from 325 to 880 litres
- Optional internal fittings: removable shelf, suspension file frame, lockable compartment. Read more on page 34

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)	Standard internal fittings
	Height	Width	Depth	Height	Width	Depth			
325	1500	700	550	1290	594	430	325	95	3 shelves
450	1950	700	550	1780	594	430	450	120	4 shelves
640	1950	950	550	1780	844	430	640	150	4 shelves
880	1950	1260	550	1780	1154	430	880	200	4 shelves

SPECIFICATIONS FOR **OPTIONAL FITTINGS** ARE AVAILABLE ON PAGE 34

Dimensions exclude handle and hinge projections.



MODEL SHOWN: DOCUMENT PROTECTION CABINETS 400W

DPC

FIRE-RESISTANT DOCUMENT CABINET



KEY FEATURES

- High-capacity storage solution with fire protection, ideal for office environments such as banks, financial institutions...
- Certified by Underwriter's Laboratories according to UL 72 Class 350 for up to 120 minutes fire protection
- Automated mechanism to ensure bolts throw whenever the door is closed
- Interlocking systems for double doors models to prevent the safe from being left open
- Anchoring kit to fix the safe on the floor and prevent unauthorised removal
- Lock alternatives:
 - Series of key locks
 - Combination lock
 - Series of electronic locks
- Choice of high-capacity sizes from 240 to 670 litres
- Optional internal fittings: removable shelf, pull-out file frame, pull-out shelf, lockable drawer, lockable cupboard. Read more on page 34

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)	Standard internal fittings
	Height	Width	Depth	Height	Width	Depth			
240	1209	759	605	1050	600	382	240	315	2 shelves
400W	1209	1160	605	1050	1000	382	401	500	2 shelves
320	1559	759	605	1400	600	382	321	395	3 shelves
670	1909	1160	605	1750	1000	382	670	650	4 shelves

SPECIFICATIONS FOR **OPTIONAL FITTINGS** ARE AVAILABLE ON PAGE 34

Dimensions exclude handle and hinge projections.



MODEL SHOWN: FIRE FILE 25" 4 DRAWERS

FIRE FILE 25"

FIRE-RESISTANT DOCUMENT FILE



KEY FEATURES

- Fire resistant filing cabinet for document storage in office environments
- Certified by Underwriter's Laboratories according to Standard 72, Class 350 Endurance for up to 60 minutes fire protection
- Interlocking system preventing more than one drawer from opening at once and eliminating risk of tipping
- Day-catch fitted to each drawer to ensure that the contents are protected from fire as long as a drawer has been pushed closed, even if the cabinet is unlocked
- The contents of the closed drawers are completely protected from fire even if one of the drawers has left open.
- High-quality steel sliders for easy access and use.
- Efficient design for high-capacity storage: available in 2 or 4 drawers
- Supplied with key lock

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			DRAWER (mm)			Volume (litres)	Weight (kg)	Fire Protection (min)
	Height	Width	Depth	Height	Width	Depth			
25" 1 hour									
2 drawers	784	551	635	290	387	460	104	164	60
4 drawers	1510	551	635	290	387	460	208	291	60

Dimensions exclude handle and hinge projections.



MODEL SHOWN: FIRE FILE 31" 4 DRAWERS

FIRE FILE 31"

FIRE-RESISTANT DOCUMENT FILE



KEY FEATURES

- Fire resistant filing cabinet for document storage in office environments
- Certified by Underwriter's Laboratories according to Standard 72, Class 350 Endurance for up to 120 minutes fire protection
- Interlocking system preventing more than one drawer from opening at once and eliminating risk of tipping
- Day-catch fitted to each drawer to ensure that the contents are protected from fire as long as a drawer has been pushed closed, even if the cabinet is unlocked
- The contents of the closed drawers are completely protected from fire even if one of the drawers has left open.
- High-quality steel sliders for easy access and use.
- Efficient design for high-capacity storage: available in 2 and 4 drawers
- Lock alternatives:
 - Key lock
 - Programmable electronic lock

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			DRAWER (mm)			Volume (litres)	Weight (kg)	Fire Protection (min)
	Height	Width	Depth	Height	Width	Depth			
1 hour									
2 drawers	784	551	779	290	387	604	136	194	60
4 drawers	1510	551	779	290	387	604	272	321	60
2 hours									
2 drawers	784	551	779	290	387	604	136	197	120
4 drawers	1510	551	779	290	387	604	272	328	120

Dimensions exclude handle and hinge projections.



MODEL SHOWN: DATAGUARD NT 80 EL

DATAGUARD NT

FIRE-RESISTANT DATA MEDIA SAFE



KEY FEATURES

- Fire-resistant safe for data media protection
- Certified by SP Technical Research Institute of Sweden according to NT Fire 017 – 120 Diskette for up to 120 minutes data media fire protection
- Easy slam action closing for full fire protection without the door being locked
- Effective design with single door safe for maximised storage
- Lock alternatives:
 - Key lock
 - Programmable electronic lock
- Choice of 3 sizes ranging from 48 to 128 litres
- Optional internal fittings: adjustable shelf, extendable drawer. Read more on page 34

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)	Standard internal fittings
	Height	Width	Depth	Height	Width	Depth			
40	700	546	566	450	346	306	48	190	1 shelf, 1 drawer
80	1025	546	590	775	346	330	89	263	1 shelf, 2 drawers
120	1025	702	590	775	502	330	128	330	1 shelf, 2 drawers

SPECIFICATIONS FOR **OPTIONAL FITTINGS** ARE AVAILABLE ON PAGE 34

*External heights and depths include plinth and handle projection. **Internal heights and widths are also equal to the clear opening measurements.



MODEL SHOWN: DATAPLUS+ 1 KL

DATAPLUS+

FIRE-RESISTANT DATA MEDIA SAFE



KEY FEATURES

- Combined fire and burglary protection for data media in office environments
- Certified by ECB•S according to EN 14450, Level S2 for burglary protection
- Certified by ECB•S according to EN 1047-1 for up to 120 minutes data media fire protection
- Tested by Underwriter's Laboratories according to UL 72
- Low weight barrier material that optimise cost, transport and installation
- Easy slam-action emergency closing
- Anchor point to prevent unauthorised removal
- Lock alternatives:
 - Key lock
 - Series of electronic locks with audit trail
- Choice of 5 sizes ranging from 111 to 556 litres
- Optional internal fittings: adjustable shelf, pull-out platform, lockable cupboard (size 5), suspended pocket shelf. Read more on page 34

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight* (kg)
	Height	Width	Depth**	Height	Width	Depth		
Size 1	911	746	780	565	490	400	111	315
Size 2	1191	746	780	845	490	400	167	390
Size 3	1471	746	780	1125	490	400	221	490
Size 4	1941	746	780	1595	490	400	313	640
Size 5	1941	1036	830	1570	780	450	556	860

SPECIFICATIONS FOR **OPTIONAL FITTINGS** ARE AVAILABLE ON PAGE 34

*Weight refers to an empty cabinet. **Gross measurement inc. 60mm for handle which can be removed for installation.



PRODUCT SHOWN: COUNTER UNIT

COUNTER UNIT

BURGLARY-RESISTANT SAFE



KEY FEATURES

- Ready-to-use deposit solution at cash tills
- Under the counter installation for discreet use
- Solid sheet steel construction
- Easy-to-reach deposit slot
- Alternative locks: 2 key locks, one to open the storage unit and 1 to release it from the counter

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			Weight (kg)	Deposit capacity
	Height	Width	Depth		
ACU 350	235	105	190	2.4	up to 350 banknotes

Dimensions exclude handle and hinge projections.



PISTOL SAFE

BURGLARY-RESISTANT SAFE



KEY FEATURES

- Designed to protect pistols from theft
- Supplied with a key lock
- Incorporates anti-drill protection
- Welded lock strap behind lock

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Weight (kg)	Standard internal fittings
	Height	Width	Depth	Height	Width	Depth		
Pistol Safe	140	320	250	128	308	218	16	–

Dimensions exclude handle and hinge projections.



DEPOSIT CONTAINER



BURGLARY-RESISTANT SAFE

KEY FEATURES

- Ideal for a small retailer to secure documents or cash
- Provides access to multiple people without reducing security
- Convenient deposit of cash
- 8mm solid steel construction
- Electronic or key lock

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Weight (kg)	Standard internal fittings
	Height	Width	Depth	Height	Width	Depth		
T1-27KD	270	350	345	260	340	290	20	–

Dimensions exclude handle and hinge projections.



MODEL SHOWN: DRUG SAFE DC1

DRUG SAFE

BURGLARY-RESISTANT SAFE




KEY FEATURES

- Suitable for storage of prescription drugs
- Ideal for hospitals, doctor's surgeries, pharmacies or any other situation where securing stock is required
- Supplied with key lock
- Constructed from 10mm solid steel
- Each model is supplied with shelves
- Available in 3 sizes
- Welded strap on lock body
- Boltwork encased when retracted
- Complies with all state codes

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)	Standard internal fittings
	Height	Width	Depth	Height	Width	Depth			
DC1	350	240	150	330	220	130	10	27	3 shelves
DC2	600	450	150	580	430	130	32	66	4 shelves
DC3	900	600	300	880	580	260	132	160	5 shelves

Dimensions exclude handle and hinge projections.

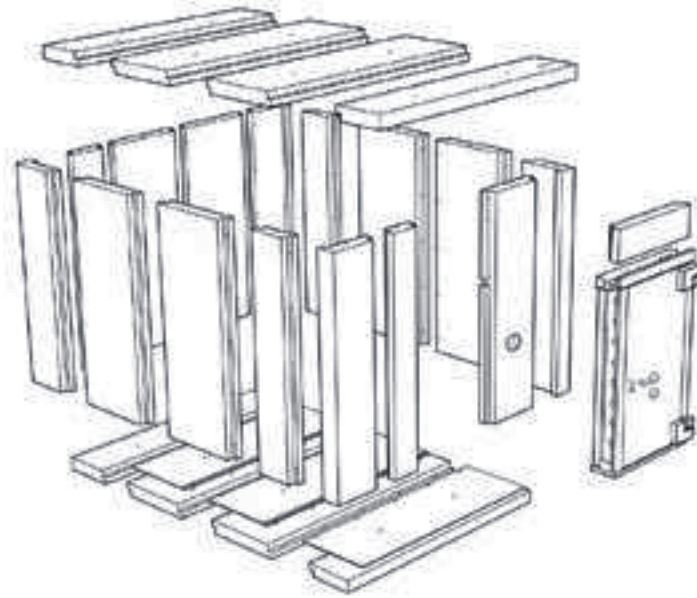

INSTAVault

BURGLARY-RESISTANT VAULT


KEY FEATURES

- Patented Chubb safes barrier materials
- 3 levels of security with panel thickness of 75mm, 110mm and 150mm
- Standard, extended and multi-bay sizes can accommodate almost any space requirement
- Full engineering and install support services provided
- Customised internal and external fit-outs available
- Install on a prepared concrete surface or for added security add an InstaVault™ floor system
- Fitted with an emergency breather tube. Emergency powered ventilators can be provided as an optional extra
- Extend, reduce and relocate your vault as your needs change

PRODUCT SPECIFICATIONS

Model	Barrier (mm)	EXTERNAL (mm)			INTERNAL (mm)			Match with Chubb safes Vault Door
		Height*	Width	Depth	Height	Width	Depth	
LS75	75	2475	2650	2650	2400	2500	2500	Holsworthy 70mm
MS110	110	2510	2720	2720	2400	2500	2500	Pacific 100mm
HS150	150	2550	2800	2800	2400	2500	2500	Bankers 130mm

* External height dimensions without an optional Chubb safes InstaVault™ floor.

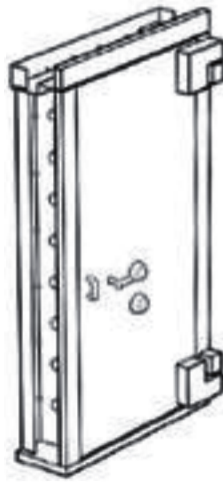

VAULT DOORS

BURGLARY-RESISTANT VAULT DOORS

KEY FEATURES

- Patented Chubb safes barrier materials
- Standard locking configurations can be complimented by alternative digital, key and KCL locks
- TOR barriers from 70mm to 130mm
- Custom and oversized versions available
- Relocking devices provided for enhanced attack protection
- Standard internal emergency release mechanism


PRODUCT SPECIFICATIONS

Model	Barrier (mm)	CLEAR OPENING			Locking	Weight (kg)	MASONRY OPENING	
		Height (mm)	Width (mm)	InstaVault Wall (mm)*			Height (mm)	Width (mm)
Holsworthy	70	1917	920	75	1 x 3 KCL	820	2050	1130
Pacific	100	1917	920	110	1 x 4 WKCL	1020	2050	1130
Bankers	130	1914	878	150	2 x 4 WKCL	1280	2050	1130


* Chubb safes Vault Doors are matched to Chubb safes InstaVault™ solutions, but are also used for poured vault installations.

OPTIONAL FITTINGS


ARCHIVE CABINET

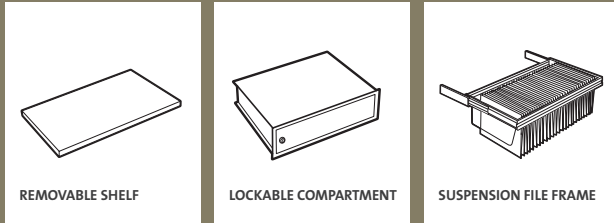


DATAGUARD NT

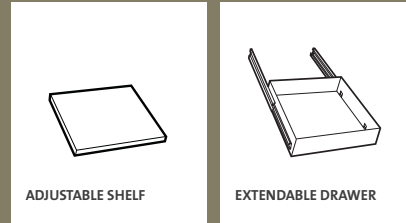


DATAPLUS+

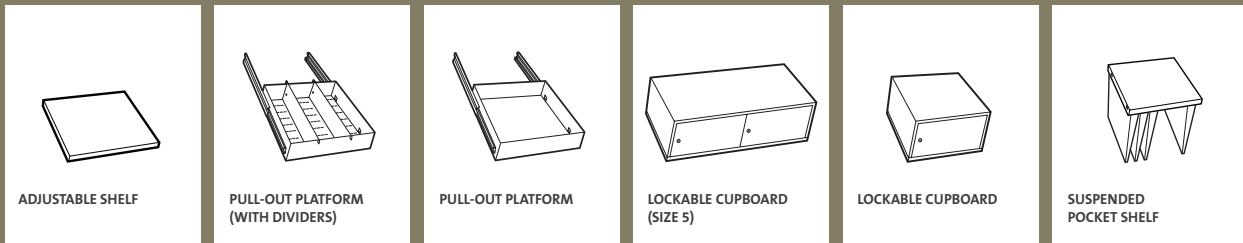


DPC

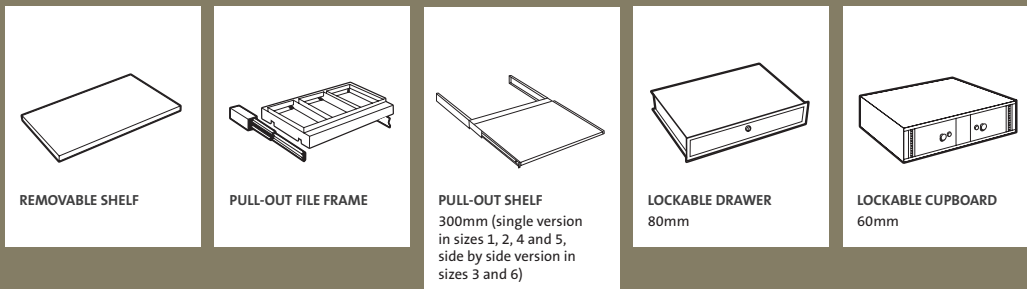


DUOGUARD

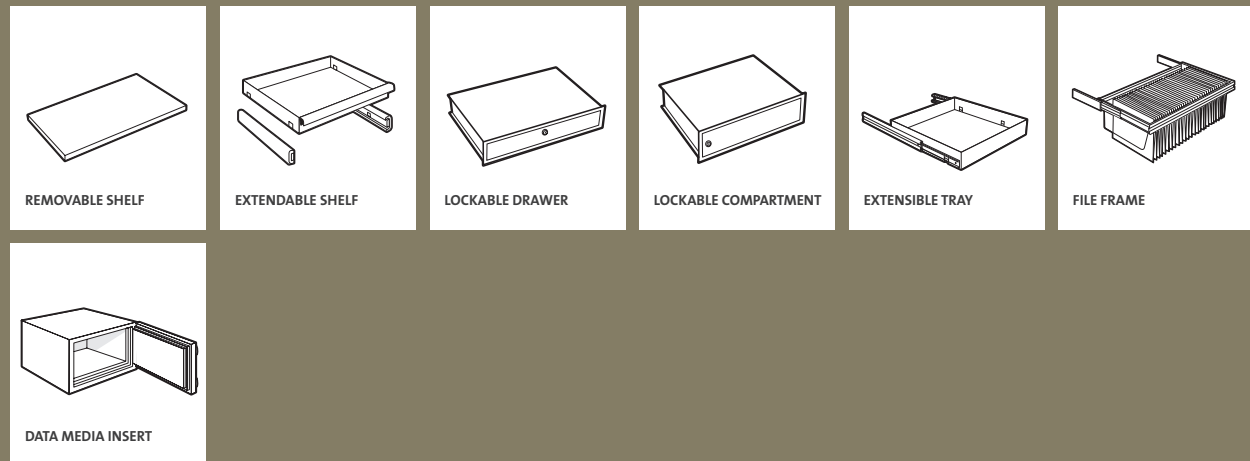

EUROPA

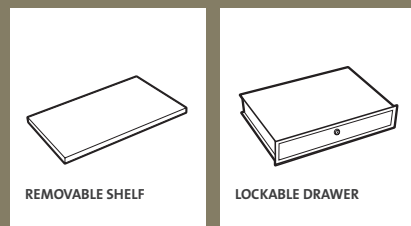

OXLEY MK III

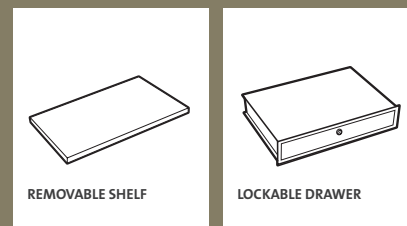

www.chubbsafes.com

Authorised dealer

